SmartPARX

Do it the smart way

COMPANY PROFILE

Automated car parking systems, designed and built in-house.

Two-post stackers · Heavy-duty · Puzzle · Pit · Custom

Ahmedabad, India · Since 2017 · ISO 9001:2015



AT A GLANCE

2500+ parking systems installed since 2017

2500+
Parking systems installed

70+
Builder & enterprise clients

10+
Two-level stacker models

2+5
Years warranty with AMC

ISO 9001:2015 certified
Technical training and quality control at the centre of every project.

Two production units
In-house manufacturing at Vatva GIDC, Ahmedabad.

Indigenous hydraulics
Cylinders and power units built through our Shalin Hydraulics partnership.

EV charging compatible
Every SmartPARX system supports EV charging provisions.

Specialists in one thing: fitting more cars

SmartPARX is a specialty car parking manufacturing brand, established in 2017 and founded by Mr. Aakash Contractor. We design, manufacture and execute customised parking equipment.

Our partnership with Shalin Hydraulics makes us the only brand in the market with indigenous hydraulic solutions and an in-house manufacturing plant.

From stacker parking to tower, puzzle and pit systems, our engineers and technicians work to ISO 9001:2015, with quality control built into every step.



WHY SMARTPARX

Six reasons developers choose us



Dynamic, robust design

In-house R&D team and state-of-the-art engineering practice. Zero tolerance on quality.



Built in-house

Steel, cylinders and power units made in our two Ahmedabad units.



Quick, accurate installation

Installed right the first time, so service calls stay rare.



Customisation

Parking lifts from 1.8 m to 10 m, built around walls and D-walls.



Widest range

The only company offering 10+ two-level stacker models.



2 + 5 year warranty

2 years zero-pay warranty, plus 5 more years with an AMC.

01



Product range

Twelve systems across four families: two-post stackers, heavy-duty, multi-level and puzzle, and specialised builds.



Four models, one for every car and budget

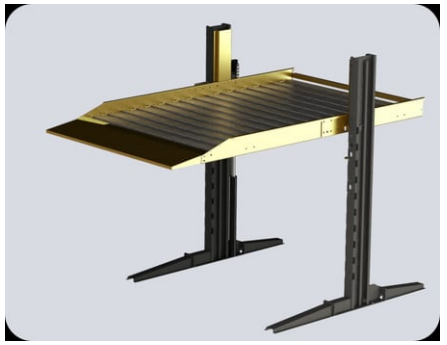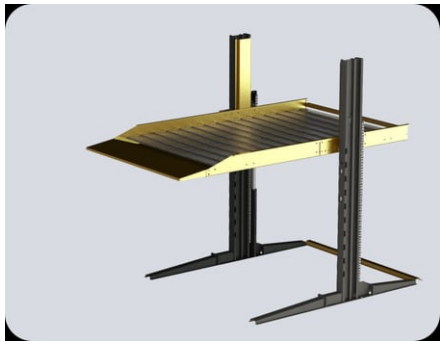


	Economy	Premium	Premium+	Luxury+
Variants	DPE01–06	DPP01–03	DPP+	DPL+
Lifting capacity	**2,000 kg**	**2,300 kg**	**2,500 kg**	**2,700 kg**
Reverse parking	Up to 1,450 kg	Up to 1,800 kg	Up to 2,000 kg	Up to 2,350 kg
Base length	1000 mm	1800 mm	2500 mm	3200 mm
System weight	700 kg	800 kg	880 kg	1020 kg
Lift mechanism	Telescopic cylinder + balancing chain	Larger telescopic cylinder, Italian DAS seals	Single-stroke cylinder, 2:1 chain	Dual cylinders + dual chains
Finish	Enamel, red-oxide primer	All-weather PU, zinc epoxy	Powder coat; HDG on request	Powder coat; HDG on request

Choose by the heaviest car, and whether it parks in reverse

Load limits by model (kg)

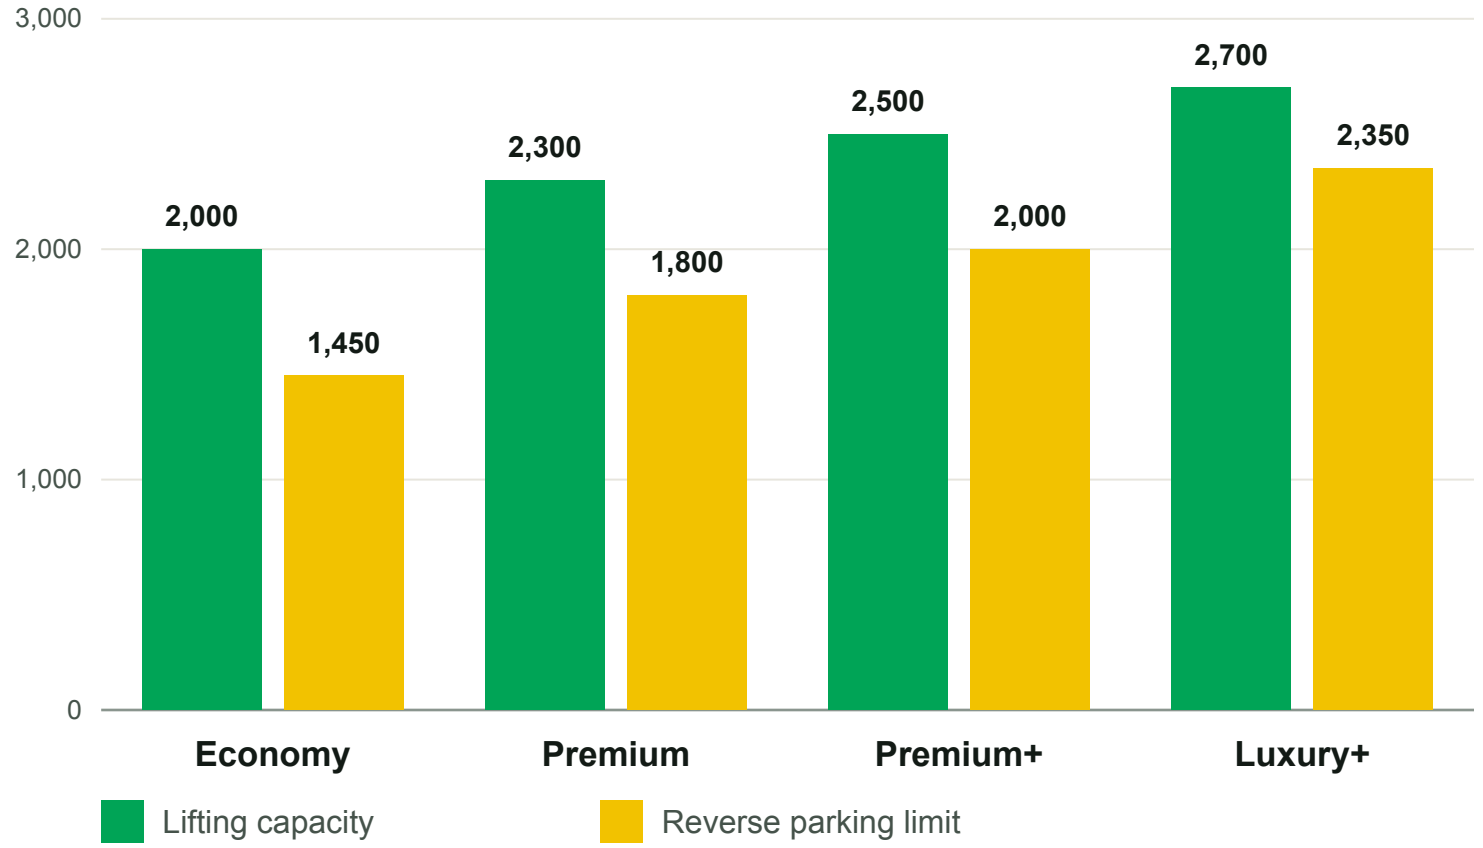

Everyday sedans

Economy lifts up to 2,000 kg for budget-friendly projects.


Reverse parking

Premium and Premium+ raise the reverse limit to 1,800 and 2,000 kg.

Luxury cars & SUVs

Luxury+ lifts 2,700 kg, load-tested to 3 tonnes for reverse parking.

Structural-steel frames for wide platforms and long spans

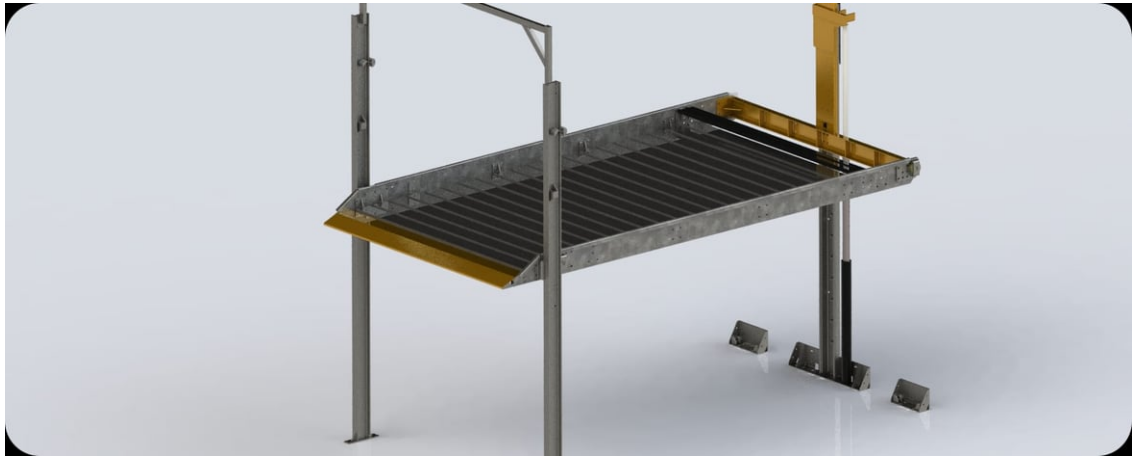

Three Pole System 2L3PS+


CAPACITY
2,500 kg

PLATFORM
2,200 – 2,700 mm

WEIGHT
1,080 kg

STRUCTURE
ISMB 150 × 75 columns, ISMC channel

DRIVE
Telescopic cylinder, double rope, 3 HP

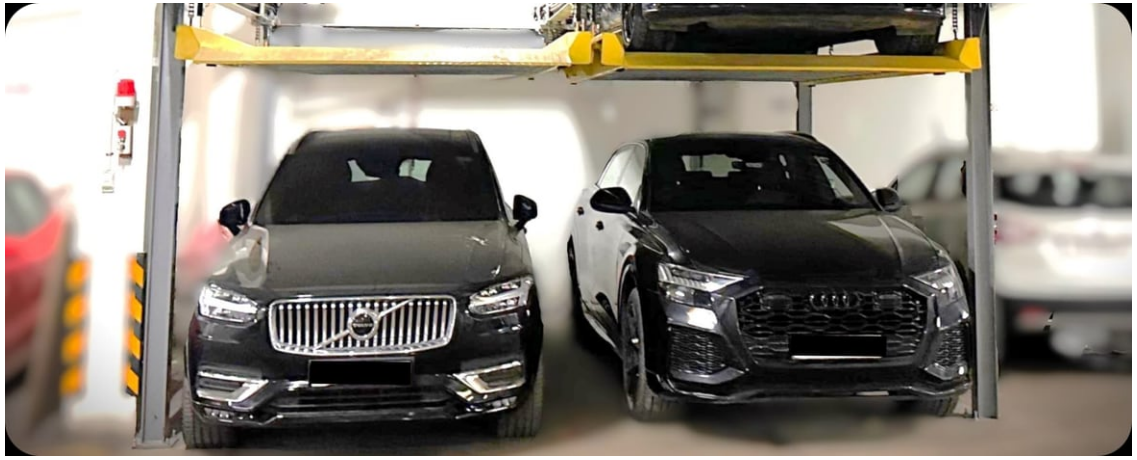

Four Pole Suspended (2×2 / 2×3)

CAPACITY
2,200 / 2,700 kg

PLATFORM
2,100 – 2,700 mm

WEIGHT
550 kg per car space

STRUCTURE
I-section / H-beam frame

DRIVE
Motor gearbox 3 / 5 HP, 4-way lifting

More levels, tighter sites, unusual structures




Puzzle Parking
Motorised pallets; any car on demand



Three Level TPP+
Three cars in one bay



Pit / Pit-Puzzle
2,000 / 2,500 kg, below grade

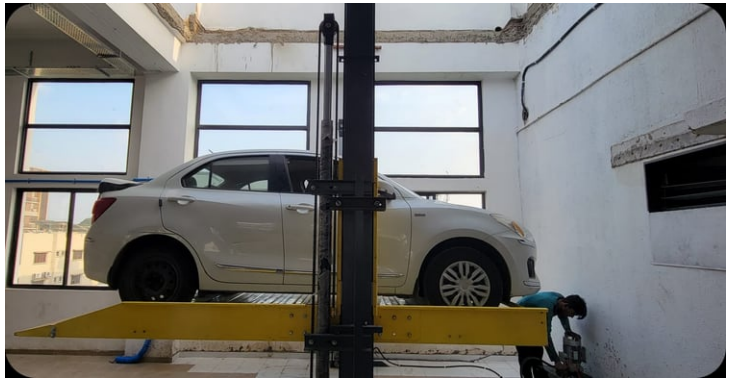

Customized
Lifts from 1.8 m to 10 m

ALSO FOR TIGHT SPACES

Single Post

2,000 kg · 2,100 mm platform. One laser-cut column for bays against walls or D-walls.

Two Wheeler

300 kg · 800 – 1,400 mm platforms on shared hydraulic lines. Doubles bike parking.

Before or after BU/OC

Specialised systems can be installed before or after permission, fitted around existing structure.

02

Planning & safety

The clear heights, column spacing and driveway widths our engineers plan for, and the protections built into every system.



Will it fit? Clear height, width and driveway

SEDAN + SEDAN

3,400 mm

Clear height · lower level
1,700 mm

SUV + SEDAN

3,800 mm

Clear height · lower level
2,100 mm

SUV + SUV

4,300 mm

Clear height · lower level
2,100 mm

Width between columns (mm)

Usable platform	1 bay	2 bays	3 bays
2,100 mm	2,480	4,960	7,440
2,200 mm (recommended)	2,580	5,160	7,740
2,300 mm	2,680	5,360	8,040
2,400 mm	2,780	5,560	8,340

5,150 mm
Bay length for cars up to 5 m (4,000 + 700 front)

5,500 mm
Minimum driveway

6,000 mm
Driveway for cars longer than 4.7 m

2,200 mm
Recommended minimum platform width

SAFETY

Three protections built into every system

Auto-lock on both columns

Spring-return mechanical locks hold the platform if hydraulics ever fail or leak. Standard on every model.

Height-adjustable limit switch

Prevents motor overload and over-travel, and sets the top position to your slab or beam.

Presence + height sensors

Stops the platform lowering onto a parked car, and stops tall cars touching the slab or services.

House rules for drivers

- Drive onto the platform at 5–10 km/h
- The car must touch the platform stop bar
- Never wash cars on or below the platform
- Keep approach slopes at 4% or less
- Keep column anchors out of standing water



03

Made in Ahmedabad

How we build, where we have installed, and who trusts us.



MANUFACTURING

We make the steel and the hydraulics



Unit 1 · Vatva GIDC, Phase-IV



Frames fabricated in-house

A fleet of Indian, American, Chinese, Swiss and German machinery, from laser cutting to honing. Every power unit is tested for its maximum rated capacity before it leaves the plant.

01	**Laser / plasma cutting**
02	**Shearing & bending**
03	**Robotic / MIG welding**
04	**CNC turret / VMC**
05	**Honing**
06	**Fabrication**
07	**Assembly**
08	**Coating & paint**
09	**Testing**
10	**Packaging & delivery**

PROJECTS

Installed across residential and commercial sites





Sarvopari, Chanakyapuri — Shayona Group



Multi-level puzzle structure



Three-level TPP+ stacker



Two-post stacker

CLIENTS

Trusted by 70+ developers and enterprises



“We chose SmartPARX again for our 1200 luxury apartments near Naranpura.”

Shri Mayur Gurjar, Partner, Gunatit Infrastructure

“Over 550 parking spaces across multiple developments. We value their honest, transparent approach.”

Shri Kanu Patel, Chairman, Avirat Group

“Used daily at The Obelisk for six years. They’ve consistently honoured the AMC.”

Shri Sunil Modi, Partner, Sanelite Group

One team from site survey to service

2+5

years of cover

2 years zero-pay warranty as standard, plus an additional 5 years with an AMC contract.

Excludes damage from water logging, debris, theft, fire and natural events.

01

Site survey & feasibility

Clear height, column spacing and driveway checked against our guidelines.

02

Customised design

Lifts from 1.8 m to 10 m, built around walls and D-walls.

03

In-house manufacturing

Two Ahmedabad units and indigenous hydraulics.

04

Installation & commissioning

Our own crews anchor, align, load-test and train your team.

05

Warranty & AMC

Scheduled maintenance that keeps systems running safely.

SmartPARX

Do it the smart way

Let's plan your parking

Book a free site survey and quotation with our engineering team.

CALL / WHATSAPP

+91 99250 36201 · +91 97129 37203

EMAIL

info@smartparx.com

HEAD OFFICE

302, Atlantis One, Sagar Sangeet Cross Roads, Ahmedabad 380060

FACTORY

C1/4524-2, Vatva GIDC, Phase-IV, Ahmedabad 382445

www.smartparx.com

